

# TECHNICAL SPECIFICATION

USB to RS485 and RS232 isolated interface

ADI-501



## Features

- High speed USB 2.0
- Opto-isolated data interface
- RX, TX, RTS, CTS signals for RS232
- FTDI chip
- Custom baud rate support
- RX and TX activity indicators
- Power supply from USB
- DIN rail mounting
- Aluminium enclosure

Industrial USB to RS232 and RS485 opto-isolated converter with FT232RL chip inside. It features embedded protection circuits such as power isolation and TVS diode, etc.



The Interface is powered directly from USB port than not need of external power supply.

Description	Parameter
<b>RS232</b>	
Input number	1
Interface type	RS232
Data rate	2400 – 921600 bps
Signals	RX, TX, RTS, CTS
Connector	DB9 male
Isolation	Opto-isolated 2.5kV RMS per UL 1577
Protection	±15 kV Using Human-Body Model (HBM)
<b>RS485</b>	
Port number	1
Interface type	RS485
Data rate	2400 – 576000 bps
Signals	A and B and ground
Connector	Pluggable screw socket
Isolation	Opto-isolated 2.5kV RMS per UL 1577
Protection	IEC 61000-4-2 level 4: – 15 kV (air discharge) – 8 kV (contact discharge) MIL STD 883C-Method 3015-6: class 3. (human body model)

Description	Parameter
<b>USB</b>	
USB port number	1
USB	USB 2.0
Connector	USB type B
Protection	IEC 61000-4-2 level 4: – 15 kV (air discharge) – 8 kV (contact discharge)
<b>System Functions Indicators</b>	
Indicators	1 x ON, RX and TX
<b>System Support</b>	
OS for USB	Linux, Windows, MAC OS
Modbus RTU	All type PLC, gateways, computers etc with Modbus RTU interface
<b>Power Supply</b>	
Power Voltage range	5V form USB
Power consumption	0.5W average
<b>Physical Characteristics</b>	
Installation	DIN-Rail, clamp
Housing	Aluminium
Weight	130g

Description	Parameter
Dimensions	88mm x 35mm x 44mm (W x H x D)
<b>Environmental Specification</b>	
Operating Temp.	-25 ~ 85°C (-13 ~ 158°F)

Description	Parameter
Storage Temp.	-40 ~ 85°C (-40 ~ 176°F)
Ambient RH	5% to 95% (non-condensing)

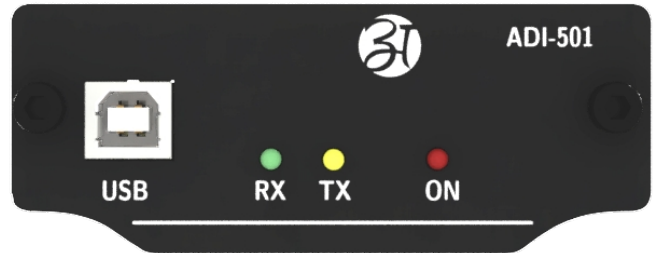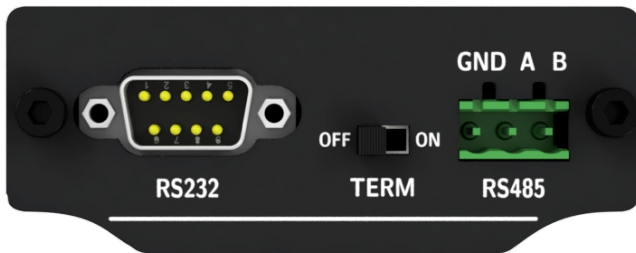

## Copyright

Copyright © 2023 Atreyo Research and Development LLP. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development LLP. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development LLP. Atreyo Research and Development LLP shall not unreasonably withhold or deny such consent but shall be entitled to receive additional equitable remuneration in connection with its grant of consent.

## Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development LLP.

All other trademarks and copyrights are the property of their respective owners.

## Disclaimer

- All dimensions mentioned in the drawings are not to scale and may vary/differ due to construction contingencies and site conditions which are subject to change as may be decided by the company.
- The specifications and amenities mentioned in this document and promotional documents are only representational and informative. The descriptions in this specification are based on the default configuration of your device.
- Images used in this specification may differ in appearance from the actual product.
- The Atreyo Research and Development LLP reserves rights to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.

**Atreyo Research  
& Development LLP**

**+91 9727741417  
info@atreyo.in**

414, Sunrise Mall, Mansi Circle,  
Vastrapur  
Ahmedabad 380015, India