

TECHNICAL SPECIFICATION

4G LTE 4 Ethernet port router with RS485

AG-743



Features

- OpenWRT system
- Fully programmable Linux environment
- Additional 512MB memory as overlay
- 4 Ethernet ports
- 4G LTE, GSM, WiFi
- GNSS
- 1 opto-isolated input, 1 output
- Opto-isolated RS485
- USB host with storage support
- Wide power supply range
- Aluminium enclosure
- DIN rail mounting

AG-743 is a 4G LTE cellular router/gateway with 4 Ethernet ports, WiFi, RS485 and digital I/O working on OpenWRT system. It can connect in multiple ways to the internet with dual SIM capability and a range of

advanced functions for mission critical IoT or M2M applications. AG-743 also support MQTT protocol for cloud application and Modbus TCP/IP or RTU for industrial applications.

Description	Parameter
Processor	
Type	MIPS24KEc
Clock	580MHz
RAM memory	
Memory size	256MB DDR2
Memory speed	1066max
Storage	
Internal flash	64MB+512MB ExtRoot support (overlay)
USB	
USB port number	1
USB type	USB 2.0, host with storage support
Connector	USB type A
Protection	IEC 61000-4-2 level 4:

Description	Parameter
	- 15 kV (air discharge) - 8 kV (contact discharge)
USB overload	500mA
Serial RS485	
Port number	1
Interface Type	RS485
Data Rate	600 – 460800 bps
Signals	A and B
Connector	Pluggable push-in
Protection	Opto-isolated 2.5 kV RMS per UL 1577
	IEC 61000-4-2 level 4: - 15 kV (air discharge) - 8 kV (contact discharge)
	Fail-safe receiver for bus open,


Description	Parameter
	short and idle
Ethernet	
Number	4
Type	10/100M port, WAN + 3x LAN
Connector	RJ45 (indicators on front)
PoE	Spare pair on ETH-1
WiFi	
WiFi type	2.4GHz
WiFi standard	IEEE 802.11/a/b/g/n, Access Points
Antenna connector	SMA female
Cellular modem ¹	
Band	Please refer table of cellular network on page 3 and 4.
SIM card	Dual nanoSIM, tray type anti-loss holder 3V/1.8V
Antenna connector	SMA female
GNSS ²	
GNSS systems	GPS, BDS, Galileo, GLONASS, QZSS
Antenna connector	SMA female
Digital inputs	
Input number	1
Input type	Opto-isolated 2.5kV
Configuration	Separate IN-GND
Connector	Pluggable push-in
Max v_{in}	30V DC
Logic 1 Voltage	3.5V to max v_{in}
Digital outputs	
Output number	1
Output type	Opto-mosfet NO (normal open) 2.5kV
Load_{max}	700mA DC up to 30V

Description	Parameter
Connector	Pluggable push-in
System functions indicators	
Indicators	ACT – activity
	WiFi
	LTE
	Fun-1, custom use
	Fun-2, custom use
	Fun-3 custom use
	4x Ethernet activity
System	
Operating systems	OpenWRT 23.05, kernel 5.15.71, Atreyo Environment V1.01.07
Booting source	Flash memory
Power supply	
Power supply	7-48V
Power consumption	1.6W (24V without LTE) TBD
Connector	Pluggable push-in (+, -, earthing)
PoE	Passive PoE over spare pairs. Not compatible with IEEE802.3af, 802.3at and 802.3bt standards
Protection	Reverse polarity, over voltage
Physical characteristics	
Installation	DIN-Rail, clamp
Housing	Aluminium
Weight	TBD
Dimensions	114mm x 84mm x 32mm
Environmental specification	
Operating temp.	-20 ~ 65°C (-4 ~ 149°F)
Storage temp.	-40 ~ 85°C (-40 ~ 185°F)
Ambient RH	5% ~ 95% (non-condensing)

1 Apply to LT models. Refer model selection chart. LTE/GSM Bands are mentioned for in Cellular table section on page 3 and 4.

2 Apply to LT models. Refer ordering chart.

Router

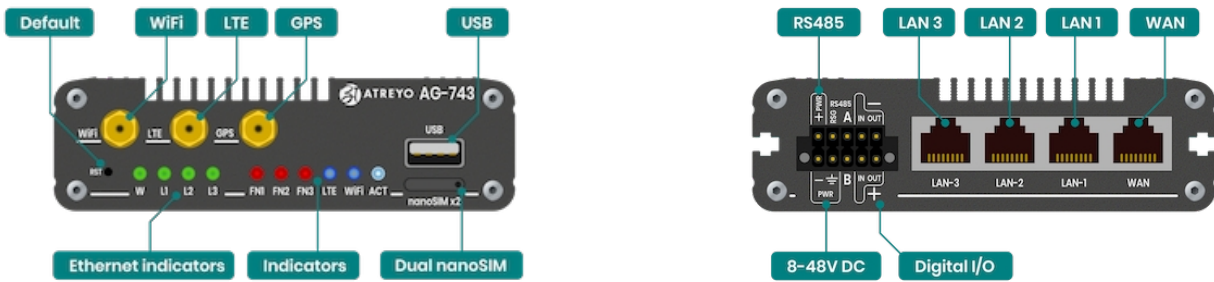

Cellular modem specification of IN (India) version

IN version of gateway	Cellular network modem details	
Band LTE FTD	B1/ 3/ 5/ 8	
Band LTE TDD	B34/ 38/ 39/ 40/ 41	
Band GSM	B3/ 8 (900/1800MHz)	
GPRS slot	Multi-slot class 12/10	
Bandwidth	1.4/ 3/ 5/ 10/ 15/ 20 MHz	
Output power	LTE-FDD	Class 3 (23 dBm ±2 dB)
	LTE-TDD	Class 3 (23 dBm ±2 dB)
	EGSM900	Class 4 (33 dBm ±2 dB)
	DCS1800	Class 1 (30 dBm ±2 dB)
Maximum data rate	LTE-FDD	10 Mbps (DL)/ 5 Mbps (UL)
	LTE-TDD	8.96 Mbps (DL)/ 3.1 Mbps (UL)
	GPRS	85.6 kbps (DL)/85.6 kbps (UL)

Cellular modem specification of EU (Europe and India) version

EU version of gateway	Cellular network modem details	
Band LTE FTD	B1/3/5/7/8/20/28	
Band LTE TDD	B38/ 40/ 41	
Band GSM	B2/3/5/8 (900/1800MHz)	
GPRS slot	Multi-slot class 12/10	
Bandwidth	1.4/ 3/ 5/ 10/ 15/ 20 MHz	
Output power	LTE-FDD	Class 3 (23 dBm ±2 dB)
	LTE-TDD	Class 3 (23 dBm ±2 dB)
	EGSM900	Class 4 (33 dBm ±2 dB)
	DCS1800	Class 1 (30 dBm ±2 dB)
Maximum data rate	LTE-FDD	10 Mbps (DL)/ 5 Mbps (UL)
	LTE-TDD	8.96 Mbps (DL)/ 3.1 Mbps (UL)
	GSM	85.6 kbps (DL)/ 85.6 kbps (UL)
Power	Compliant to GSM phase 2/2+	
	- Class 4 (2 W 900MHz) - Class 1 (1 W 1800MHz)	

Cellular modem specification of GL (global) version

GL version of gateway	Cellular network modem details	
Band LTE FTD	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28	
Band LTE TDD	B38/B39/B40/B41	
Band WCDMA	B1/B2/B4/B5/B6/B8/B19	
Band GSM	B2/B3/B5/B8	
Output power	GSM850	Class 4 (33 dBm ±2 dB)
	EGSM900	Class 4 (33 dBm ±2 dB)
	DCS1800	Class 1 (30 dBm ±2 dB)
	PCS1900	Class 1 (30 dBm ±2 dB)
	GSM850 8-PSK	Class E2 (27 dBm ±3 dB)
	EGSM900 8-PSK	Class E2 (27 dBm ±3 dB)
	DCS1800 8-PSK	Class E2 (26 dBm ±3 dB)
	PCS1900 8-PSK	Class E2 (26 dBm ±3 dB)
	WCDMA	Class 3 (24 dBm +1/-3 dB)
	LTE-FDD	Class 3 (23 dBm ±2 dB)
	LTE-TDD	Class 3 (23 dBm ±2 dB)
Maximum data rate LTE	LTE-FDD	150 Mbps (DL)/Max. 50 Mbps (UL)
	LTE-TDD	130 Mbps (DL)/Max. 30 Mbps (UL)
Maximum data rate UMTS	DC-HSDPA	42 Mbps (DL)
	HSUPA	5.76 Mbps (UL)
	WCDMA	384 kbps (DL)/Max. 384 kbps (UL)
Maximum data rate GSM	EDGE	296 kbps (DL)/Max. 236.8 kbps (UL)
	GPRS	107 kbps (DL)/Max. 85.6 kbps (UL)

Standard model list

These are models in regular production. Other models are only made on order with a minimum order quantity. Please [contact us](#) if you require a custom order.

Model	Hardware Options			More information
	Cellular Network			
AG-743	GPRS	3G	LTE	
AG-743				Without cellular modem
AG-743-LT-EU	✓		✓	Model for India and EU
AG-743-LT-GL	✓	✓	✓	Global model

Table with model structure for ordering

Model Structure	
Model structure example	AG-743- LT- EU
Base model name	
AG-743	
Cellular communication modem	
LT (cellular communication modem present)	
LTE/GSM module regional information	
IN (cellular modem for India)	
EU (cellular modem for India and Europe)	
GL (global cellular modem)	

Standard package list

- 1 AG-743 Router
- 2 Cellular antenna¹
- 3 WiFi antenna
- 4 GNSS antenna
- 5 DIN rail clamp with screws
- 6 SIM tray pin
- 7 Female 10 pin main connector without cable

Please note: The set does not include a power supply.

¹ Models without a cellular modem will also not include cellular and GNSS antennas.

**For more details
scan or click on
QR code**



Copyright

Copyright © 2026 Atreyo Research and Development Pvt. Ltd. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development Pvt. Ltd. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development Pvt. Ltd.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development Pvt. Ltd. All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- The information contained in this Technical Specification is provided "as is" and is subject to change without notice. While every effort has been made to ensure the accuracy and completeness of the information contained herein, Atreyo

Research and Development Pvt. Ltd. assumes no responsibility or liability for any errors or omissions.

- Images used in this specification may differ in appearance from the actual product.
- All dimensions mentioned in the drawings are not to scale and are subject to change and update as may be decided by the Atreyo Research and Development Pvt. Ltd.
- Atreyo Research and Development Pvt. Ltd. makes no warranties, either express or implied, regarding the contents of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.
- Users of this Technical Specification should verify the applicability and suitability of the information and procedures to their particular use. Atreyo Research and Development Pvt. Ltd. shall not be liable for any damages, including but not limited to direct, indirect, special, incidental, or consequential damages, arising from or related to the use or inability to use this Technical Specification or the products described herein.
- By using this Technical Specification, you agree to the terms and conditions stated above. Atreyo Research and Development Pvt. Ltd. has right to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.

**Atreyo Research
& Development Pvt. Ltd.**

**+91 9727741417
info@atreyo.in**

414, Sunrise Mall, Mansi Circle,
Ahmedabad, Gujarat, India