



Features

- Garbage level detection
- Thermal alert
- Vibration detection alert
- Robust design
- Remote setting option
- IP66 protection
- Extended battery life

Atreyo waste management system is IoT based efficient way to reduce waste collection costs with real time dustbin location update and waste fill-level detection.

Bin Sensor detects the fill-level of waste bins and sends the data to the server, which helps to optimise the route for


waste collection vehicle. Waste management system helps to reduces time waste and cost.

AWMS-DBS12 is sensor to detect garbage level in dustbins. Sensor is detecting garbage in defined interval of time and sending the garbage data to the server. High temperature and vibration alerts are send instantly.

Category	Description
Dimension	Ø 120mm, height 60mm
Material of body	ABS
Principle of operation	Ultrasonic measurement system
Detection range	Configurable: 10 - 250cm
Communication with server	GPRS
Battery lifetime (storage mode)	10 years
Battery life (work mode)	Approx. 5 year (considering 3 communication per day with server)
Battery type	Non rechargeable Lithium Battery
Working mode types:	Work mode Setting mode

Category	Description
	Sleep mode
Vibration sensor	With configuration of vibration time alert
Temperature sensor	With temperature alert setting
Indicator in setting mode	Multi-colour LED indicator
Configuration	By SMS
Environmental	Operating temperature from -5°C to +80°C Humidity: 5% to 95% RH IP protection IP66

Dimensions of bin sensor device:

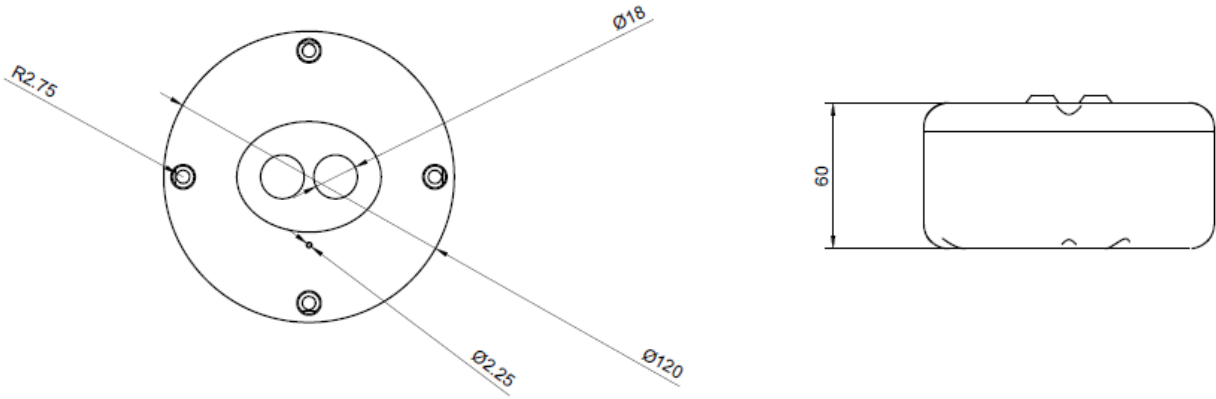

Copyright

Copyright © 2026 Atreyo Research and Development Pvt. Ltd. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development Pvt. Ltd.. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development Pvt. Ltd.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development Pvt. Ltd. All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- The information contained in this Technical Specification is provided "as is" and is subject to change without notice. While every effort has been made to ensure the accuracy and completeness of the information contained herein, Atreyo Research and Development Pvt. Ltd. assumes no responsibility or liability for any errors or omissions.
- Images used in this specification may differ in appearance from the actual product.
- All dimensions mentioned in the drawings are not to scale and are subject to change and update as may be decided by the Atreyo Research and Development Pvt. Ltd.
- Atreyo Research and Development Pvt. Ltd. makes no warranties, either express or implied, regarding the contents of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.
- Users of this Technical Specification should verify the applicability and suitability of the information and procedures to their particular use. Atreyo Research and Development Pvt. Ltd. shall not be liable for any damages, including but not limited to direct, indirect, special, incidental, or consequential damages, arising from or related to the use or inability to use this Technical Specification or the products described herein.
- By using this Technical Specification, you agree to the terms and conditions stated above. Atreyo Research and Development Pvt. Ltd. has right to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.